

## BANNER MARKETING GROUP BANNERS & FLAGS UNLIMITED

(Since 1983)

**CALL FOR CALIFORNIA OFFICE LOCATIONS**

1353 E. Central Ave. (Ste. 313)—Sutherlin, OR 97479

California & Oregon Offices (805) 528-5018

[info@bannermarketinggroup.com](mailto:info@bannermarketinggroup.com) [www.bannermarketinggroup.com](http://www.bannermarketinggroup.com)

[www.linkedin.com/pub/jeff-alan/60/988/632](http://www.linkedin.com/pub/jeff-alan/60/988/632)


## GROUND STAKE BRACES



Leaning Flag Sets



Ground Stakes with Braces

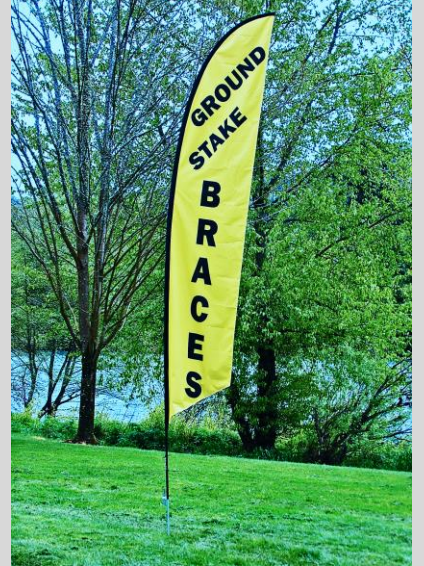

Vertical Flag Set

**THE PROBLEM:**  
Flag Sets Lean

**THE SOLUTION:**  
Flag sets remain vertical with Ground Stake Braces

All Feather, Tear Drop, and Vertical Style Outdoor Flag Sets lean or fall over due to soft or sandy soil conditions which are caused by rain, sprinklers, and heavy winds. The Ground Stake Braces help to provide the traditional Ground Stake the structural support it needs to brace it properly so the flagpole remains vertical or upright at all as much as possible. Whether using a 360° revolving or stationary style Ground Stake, Flag Sets with messages or images on them that lean or fall over makes them difficult to read or even a total waste of money. Cities throughout the United States are now beginning to consider issuing fines to those not addressing the problem of Flag Sets falling over which has also proved to be a dangerous safety issue to both pedestrians and vehicles. Another added value using Ground Stake Braces is that they can help as a possible deterrent against Flag Set theft. Once the Braces are secured in the ground, they hold the Ground Stake so securely in place it makes it much more difficult to remove the flag. The only tool you'll need to install and remove the Ground Stake Braces is a claw style hammer.

- ▶ FOB: Maryland
- ▶ Manufactured in USA
- ▶ Specifications: Each set consists of (2) 5" wide X 11" high X 1 1/4" deep extremely heavy-duty 14 gauge flat galvanized steel Braces with a 1 1/8" diameter hole at the top to accommodate a 1" diameter Ground Stake stem. Each 2-piece set is approximately 2 lbs.
- ▶ Ground Stake Braces are a one-time investment if cared for properly and are re-useable.

### INSTALLATION & REMOVAL INSTRUCTIONS

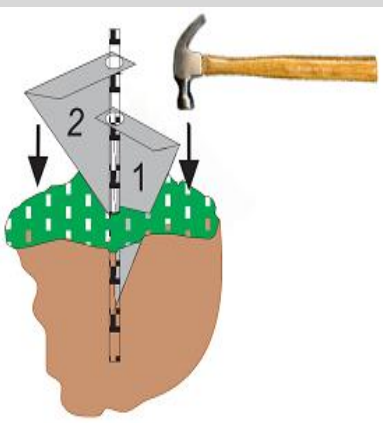


Image #1



Image #2



Image #3



Image #4

1. Slide the bottom stem of the Ground Stake through the hole at the top of both Ground Stake Braces (Image #3).

2. After you have pushed or hammered the Ground Stake down as far as possible into the ground with both Ground Stake Braces attached (see Image #1), begin hammering the Brace (#1 in Image #1) that's closest to the ground first, then hammer down the top Brace (#2 in Image #1) alternating from the top to the bottom a little bit at a time until both are flush to the ground (Image #3).
3. Use the claw part of your hammer (Image #4) or any other tool to slide underneath the folded edge of the steel Brace and pull up until the Brace along with the entire Ground Stake is removed.

## **PRICES**

**Call Jeff Alan for prices at (805) 528-5018 or send us an e-mail to [info@bannermarketinggroup.com](mailto:info@bannermarketinggroup.com).**